

OSRO STRAPS

RSC Ekusasa Mining is the Original Equipment Manufacturer (OEM) and supplier of Osro Straps to the mining industry in Africa.

Description

Osro Straps are used to support fractured ground between rock anchors by providing a continuous mesh between the anchor points. Osro Straps may be bolted to the rock by two or more rock anchors and can be bent to conform to the rock surface. Because anchors locate at any point through the mesh the strap may be used with any rock bolting spacing.

Advantages of the product

- Provides a large areal coverage for fractured rock.
- Available in a range of lengths and widths.
- Accommodates all bolt spacing patterns.
- Large support areas can be created by over lapping the edges of the Osro Straps.


Dimensional Specifications

Dimension Width (mm)	Length (m)	Rod Thickness (mm)	Configuration
250	1.0 - 6.0	8 or 10	4 rod
300	1.0 - 6.0	8 or 10	5 rod


General Disclaimer

The information contained within this document is correct at the time of publishing and every attempt is made to ensure its accuracy. The information contained within is subject to change without notice. All information should be viewed as guidelines and are for information purposes only.

RSC Ekusasa Mining Joint Venture (Pty) Ltd is not responsible to ensure the correct use, application or installation of this product. All intellectual property is owned by RSC Ekusasa Mining Joint Venture (Pty) Ltd and any unauthorised use thereof will be viewed as an infringement on their rights.

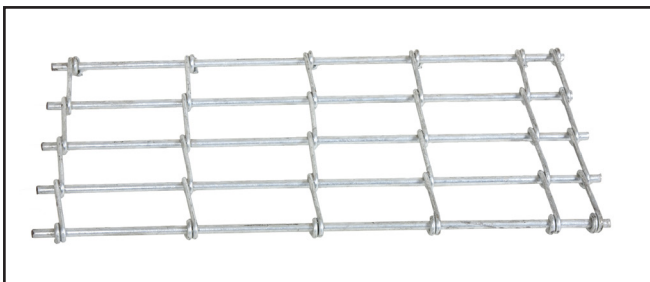

Galvanised - Osro Strap

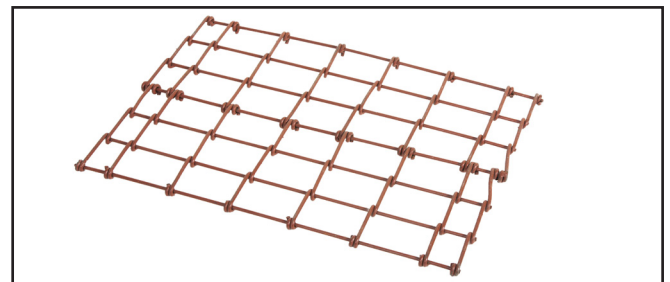

Red Oxide - Osro Mat

